

# FI-3000 / FI2-7300 FiberInspector™ Ultra Camera

#### Overview

The FI-3000 FiberInspector™ Ultra is the industry's most complete fiber inspection solution. It's the only inspection camera that supports single fiber or MPO; automated or instant manual inspection and works with the Versiv™ Cabling Certification System, LinkWare™ or your smartphone. Get an instant view of the fiber endface using the Live View feature. Then use the simple gesture-based interface to zoom in fiber or perform an optional automated PASS/FAIL analysis in seconds. Its rugged, ergonomic design makes it comfortable even when inspecting hundreds of bulkheads and cables. Choose from two user interface and reporting methods. First, the iOS/Android app allows you to inspect your MPO installation using your phone and easily share your inspection results via text or even social media. Second, pair the FiberInspector with Versiv™ Cabling Certification System using its user interface and industry-leading LinkWare™ reporting system. With Versiv and LinkWare you can test copper, fiber loss, OTDR and inspection and combine the results into one complete report.

The FiberInspector™ Ultra is available in two models:

- FI-3000 FiberInspector™ Ultra works with both the Versiv™ Cabling Certification System and mobile devices.
- FI2-7300 FiberInspector™ Ultra Kit includes the FI-3000 camera and Versiv 2 mainframe.



#### Eliminate the #1 Cause of Fiber Failure

Endface contamination the leading cause of fiber failures. Dirt and debris cause insertion loss and reflections that inhibit optical transmission and cause havoc with transceivers. Fiber loss and OTDR testing can expose this problem, but in many cases, dirty connections make fiber testing time consuming and inaccurate.

Since dirt can be an issue before, during, or after fiber optic certification testing, and migrate from one end-face to another upon mating, both sides of any connection must always be cleaned and inspected. Further, mating contaminated connectors can cause permanent damage as microscopic debris is crushed between end-faces in physical contact. Even factory terminated patch cords or pigtails must be inspected as protective caps do not keep end-faces clean. Avoiding this common cause of failure starts with inspecting the end-face and eliminating any contamination before insertion into a bulkhead or piece of





equipment. Inspection is critical for MPO based fiber installations as dirt and other debris can be easily moved from one fiber end face to another.

### Grab the Most Complete, Efficient Inspection Solution

The FI-3000 FiberInspector™ Ultra offers an extensive feature set that makes testing MPO trunks, cassettes, array cables or single fibers easy and efficient. The multiple camera design with autofocus provides a Live View of the entire endface on your Versiv or smartphone instantly – then use simple touchscreen gestures to get a detailed view of endfaces in real time. Touch "TEST", and in seconds, you'll get an automated PASS/FAIL result compliant with IEC 61300-3-35. Use the industry-leading LinkWare platform to store complete project reports including copper, fiber loss, OTDR and endface images or store results on your phone and share them through text messages or email. The compact, ergonomic design with autofocus makes it comfortable and fast even when you're testing hundreds of cable or ports.

- Total endface visibility with Live View from full trunk to individual endface
- Integrates with Versiv™ Cabling Certification System and LinkWare™ Reporting Software for simple operation and documentation or with mobile phones for testing and sharing
- Optional automated PASS/FAIL results in less than two seconds per fiber
- Multiple Autofocus/Autocentering Camera design for real time imaging
- Rugged, ergonomic design
- Supports one or two rows of 8,12, 16 or single UPC or APC connectors

#### Live View with AutoFocus and AutoCentering for Instant Real Time Visibility

Plug the connector into the FI-3000 camera, touch the autofocus button, and the Live View feature delivers a live view of the fiber endface immediately – with no setup or processing time. Dual cameras provide a single, integrated view of the single fiber or entire MPO endface. Use simple gestures to zoom into the portion of interest, pan across the connector or just tap the image of a specific fiber for a detailed view. For documentation, high resolution images of the endface can be stored in the Versiv mainframe, uploaded to LinkWare for reporting or to a mobile phone for easy sharing.

### Single fiber results

MPO results


#### **Detailed Reporting**

Single fiber results MPO results








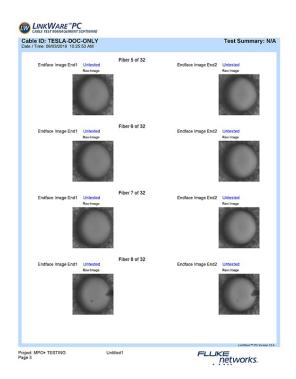

Summary or detailed reports are available.



Generate detailed PDF reports from your phone or Versiv™ tester. Versiv™ and LinkWare™ also support integrated reports including Tier 1 (Loss) and Tier 2 (OTDR) tests.

### Integrates with Versiv<sup>™</sup> and LinkWare<sup>™</sup> for Project Management and Reporting

For those installing multiple fiber links, MPO trunks, cassettes or array cables as part of a new installation or upgrade, the FI-3000 integrates with any Versiv<sup>™</sup> Cabling Certification System for fast, error free project management and reporting. The Versiv brand ProjX<sup>™</sup> Management System lets you define each job including the types of cables, identifiers, required tests, and limits. Techs can use the same platform for loss (Tier 1), OTDR (Tier 2) and inspection, reducing training costs and the likelihood of errors. The FI-3000 connects to Versiv via a USB cable.

Versiv features a large, high resolution display that lets you see the results clearly. The gesture-based Taptive™ screen makes it easy to pan across or zoom in and out of the Live View image.

The FI-3000 camera when used with a Versiv mainframe also works with LinkWare – the defacto industry standard for documenting cabling systems. LinkWare lets you combine Tier 1, Tier 2 and inspection results into a single report for full documentation of every link in the system. The cloud-based version, LinkWare Live, makes it easy to track progress of the job from your smartphone or PC and share results with customers.

The FI-3000-NW option provides the user with the ability to test connections using Versiv in secure facilities that do not allow wireless capable devices. This kit has the same configuration as the FI-3000 but with Wi-Fi disabled.



### Optional Automated Pass/Fail Testing of Endfaces in Seconds

The FI-3000 camera's optional autotest mode examines all fiber endfaces in the connector, grades them as per industry standard IEC 61300-3-35 and provides an overall PASS or FAIL result in less than two seconds per fiber. The gesture-based user interface makes it easy to switch from the summary to a detailed view.

When an endface fails, the FI-3000 camera shows which fibers failed, and highlights the areas that caused the failure: contamination, pits, chips and scratches. By understanding the cause of the failure, the user can determine the type of cleaning needed or if the connector is damaged beyond repair.







Seamlessly switch from a summary view (left) to an image (center), then use the gesture-based interface to zoom into a view of each individual fiber (right) and pan across the entire connector. Individual fibers are labeled so you know what you're looking at. Red defects are failures, green are acceptable per the selected standard.

- Interchangeable tips support one or two rows of 8, 12, 16 or single UPC or APC connectors
- 2. PortBright™ illumination for dark and crowded patch panels
- 3. Protective cover with tether
- 4. AutoFocus Control
- PortBright™ on/off

- 6. LED's indicate PASS/FAIL and Wi-Fi connection
- 7. Start an automated test without reaching for your Versiv™ or smartphone
- 8. Auto-off saves battery life
- 9. Ergonomic design comfortable for inspecting cables or ports
- 10. Rugged design for constant field usage
- 11. USB port for charging Li-Ion battery and connecting to Versiv

#### Lightweight, Ergonomic Design with Holster

The unique design of the FI-3000 camera makes it easy to inspect both bulkheads and trunk cables. The compact and lightweight (326 g / 11.5 oz) design means you can use it all day without fatigue. The built-in PortBright™ illumination makes it easy to find the right port in dense patch panels in dim data centers or dark wiring closets. All FI-3000 models include a holster which provides convenient access to the camera as well as storage for inspection tips and a QuickClean™ cleaner.

### iOS and Android Apps for Simple Data Sharing





The FI-3000 camera can be connected over Wi-Fi to iOS or Android devices for small jobs or a quick inspection. The FiberInspector app (FI-IN) shows simple PASS/FAIL results, but also gives you complete control over the FI-3000 camera, so you can zoom in or out of each endface and pan across a Live View of the entire endface. FI-IN supports naming and storing of results in the device – or send them as an image or PDF report to others on the team for quick, simple collaboration.







Save results on your phone or share them with others.

### The Complete Solution for Fiber Inspection

The FI-3000 FiberInspector Ultra comes with everything you need to test nearly any type of fiber:

- Ergonomic and Rugged FI-3000 Camera with USB and Wi-Fi communications
- MPO tips for 12/24 UPC and 12/24 APC connectors
- Adapter for single fiber

The FI2-7300 FiberInspector Ultra Kit adds a Versiv™ mainframe to the FI-3000



FI-3000 FiberInspector Camera Kit







FI2-7300 FiberInspector(TM) Ultra Camera Versiv Kit

## Ordering Information

FI-3000 Wireless Models, Tips, Adapters, and Accessories		
Model	Description	
FI2-7300	The FI2-7300 FiberInspector™ Ultra Kit contains: Versiv Mainframe, FI-3000 MPO/Single fiber Camera, Holster, USB-USB C cable to connect the probe to the mainframe, Tip Set (12/24 UPC and 12/24 APC), Single Fiber Adapter for FI-1000 tips, Blank Module to protect the mainframe's rear connector, AC Charger, Shoulder Strap, USB Interface Cable, Versiv Open Source Software CD, Integrated Wi-Fi, Getting Started Guide, Soft Carrying Case.	
FI2-7300-NW	Same configuration as the FI2-7300 with integrated Wi-Fi disabled.	
FI-3000	FI-3000 FiberInspector Ultra Camera, with Tip Set (12/24 UPC and 12/24 APC), Single Fiber Adapter for FI-1000 tips, AC charger, Getting Started Guide, Holster, Soft Carrying Case	
FI-3000-NW	Same configuration as the FI-3000 with integrated Wi-Fi disabled	
FI2-7300 DC KIT	The Data Center Fiber Inspection & Fiber Detection Kit w/Wi-Fi includes Versiv Mainframe with Wi-Fi, MPO Probe, Single fiber adapter, USB-USB C cable to connect the probe to the mainframe, Tip Set (12/24 UPC and 12/24 APC), Blank Module to protect the mainframe's rear connector, AC Charger, Shoulder Strap, USB Interface Cable, Integrated Wi-Fi, Getting Started Guide, Soft Carrying Case, VisiFault(TM) visible fault locator, FI-1000 Tip Kit, FiberLert Live Fiber Detector, FI-3000TP-AMPO-12-32 keyless MPO inspection tip, set of five 1.25 mm QuickClean endface cleaners, set of five 2.5 mm QuickClean endface cleaners.	
FI2-7300 DCKIT-NW	The Data Center Fiber Inspection & Fiber Detection Kit without Wi-Fi includes Versiv Mainframe with Wi-Fi disabled, MPO Probe, Single fiber adapter, USB-USB C cable to connect the probe to the mainframe, Tip Set (12/24 UPC and 12/24 APC), Blank Module to protect the mainframe's rear connector, AC Charger, Shoulder Strap, USB Interface Cable, Integrated Wi-Fi, Getting Started Guide, Soft Carrying Case, VisiFault(TM) visible fault locator, FI-1000 Tip Kit, FiberLert Live Fiber Detector, FI-3000TP-AMPO-12-32 keyless MPO inspection tip, set of five 1.25 mm QuickClean endface cleaners, set of five 2.5 mm QuickClean endface cleaners.	
FI-3000TP AMPO 12-32	Keyless Adapter for MPO APC 12/24, 16/32 Fibers for FI-3000	
FI-3000TP MMC ADP	MMC Patch Cord Adapter Tip for FI-3000	





FI-3000TP-UMPO12F	MPO 12 or 24 UPC tip
FI-3000TP-AMPO12F	MPO 12 or 24 APC tip
FI-3000TP-UMPO16F	MPO 16 or 32 UPC tip
FI-3000-1000ADP	Adapter to connect FI-1000 tips to FI-3000 probe
FI-3000-500ADP	FI-3000-500ADPAdapter to connect FI-500 tips to FI-3000 probe
FI1000-1.25-UTIP	1.25 universal patch cord
FI1000-LC-PCTIP	LC patch cords
FI1000-1.25APC-TIP	1.25 APC universal patch cord
FI1000-LCAPC-PTIP	LC APC universal patch cord
FI1000-2.5-UTIP	2.5 universal patch cord
FI1000-2.5APC-UTIP	APC universal patch cord
FI1000-EXND-LC-TIP	Extended LC Bulkhead
FI1000-LCAPC-BTIP	LC/APC lens bulkhead
FI1000-SCFC-tip	SC and FC Bulkhead
FI1000-SCAPC-Tip	SC/APC bulkhead cord end faces
FI1000-ST-TIP	ST bulkhead video probe tip
Extd Tip SN/MDC	Series 2 extended probe tip for female SN or MDC
S2 Guide SN Female	Series 2 guide for female SN connectors
S2 Guide MDC Female	Series 2 guide for female MDC connectors
SN-Extd Tip KIT	Series 2 Extended Tip Kit (guide & tip) for female SN
MDC-Extd Tip KIT	Series 2 Extended Tip Kit (guide & tip) for female MDC
Probe Tip 1.25 Male	Series 2 slim probe tip for 1.25mm male connectors
Tip w/bend LC APC FM	Short extended tip with bend, LC APC for female connectors
FI-3000-Holster	Holster for the FI-3000 probe
QC-MPO-12/24-1P	QuickClean Cleaner for MPO 12/24 Fiber, Single Pack
QC-MPO-12/24-5P	QuickClean Cleaner for MPO 12/24 Fiber, Pack of 5 cleaners
QC-MPO-16/32-1P	QuickClean Cleaner for MPO 16/32 Fiber, Single Pack
QC-MPO-16/32-5P	QuickClean Cleaner for MPO 16/32 Fiber, Pack of 5 cleaners
QuickClean-1.25-1P	QuickClean Cleaner 2.5 mm Fiber, Single Pack





QuickClean-1.25-5P	QuickClean Cleaner 2.5 mm Fiber, Pack of 5 cleaners
QuickClean-2.5-1P	QuickClean Cleaner 2.5 mm Fiber, Single Pack
QuickClean-2.5-5P	QuickClean Cleaner 2.5 mm Fiber, Pack of 5 cleaners
QC-LC-Duplex-1P	QuickClean Cleaner for LC Duplex connectors, Single Pack
QC-LC-Duplex-5P	QuickClean Cleaner for LC Duplex connectors, Five Pack
QC-MDC-1P	QuickClean Cleaner for MDC Connectors, Single Pack
QC-MDC-5P	QuickClean Cleaner for MDC connectors, Five Pack
QC-MMC-12-24-1P	QuickClean Cleaner for 12-24 MMC Connectors, Single Pack
QC-MMC-12-24-5P	QuickClean Cleaner for 12-24 MMC connectors, Five Pack
QC-MMC-16-1P	QuickClean Cleaner for 16 MMC Connectors, Single Pack
QC-MMC-16-5P	QuickClean Cleaner for 16 MMC connectors, Five Pack
VERSIV2 M/RU KIT	VERSIV V2 Main & Remote Upgrade Bundle with Wi-Fi
VERSIV2 M/RU-NW KIT	VERSIV V2 Main & Remote Upgrade Bundle Non-Wi-Fi
Gold Support Models	
Model	Description
Model GLD-FI-7300	Description  1 year Gold Support for the FI2-7300 kit
	·
GLD-FI-7300	1 year Gold Support for the FI2-7300 kit
GLD-FI-7300 GLD3-FI-7300	1 year Gold Support for the FI2-7300 kit 3 year Gold Support for the FI2-7300 kit
GLD-FI-7300 GLD3-FI-7300 GLD-FI-3000	1 year Gold Support for the FI2-7300 kit 3 year Gold Support for the FI2-7300 kit 1 year Gold Support for the FI-3000 camera
GLD-FI-7300 GLD3-FI-7300 GLD-FI-3000 GLD3-FI-3000	1 year Gold Support for the FI2-7300 kit 3 year Gold Support for the FI2-7300 kit 1 year Gold Support for the FI-3000 camera
GLD-FI-7300 GLD3-FI-3000 GLD3-FI-3000 Environmental	1 year Gold Support for the FI2-7300 kit  3 year Gold Support for the FI2-7300 kit  1 year Gold Support for the FI-3000 camera  3 year Gold Support for the FI-3000 camera
GLD-FI-7300 GLD3-FI-3000 GLD3-FI-3000 Environmental Temperature range	1 year Gold Support for the Fl2-7300 kit  3 year Gold Support for the Fl2-7300 kit  1 year Gold Support for the Fl-3000 camera  3 year Gold Support for the Fl-3000 camera  Operating: -10° C to +45° C (+14° F to +113° F) Storage: -10° C to +60° C (+14° F to +140° F)  Operating: 0 % to 95 % (32° F to 95° F, 0° C to 35° C) RH non-condensing Storage: 0 % to 95 % (95° F to 113° F, 35° C to
GLD-FI-7300 GLD3-FI-7300 GLD-FI-3000 GLD3-FI-3000  Environmental Temperature range  Humidity range	1 year Gold Support for the FI2-7300 kit  3 year Gold Support for the FI2-7300 kit  1 year Gold Support for the FI-3000 camera  3 year Gold Support for the FI-3000 camera  Operating: -10° C to +45° C (+14° F to +113° F) Storage: -10° C to +60° C (+14° F to +140° F)  Operating: 0 % to 95 % (32° F to 95° F, 0° C to 35° C) RH non-condensing Storage: 0 % to 95 % (95° F to 113° F, 35° C to 45° C) RH non-condensing
GLD-FI-7300 GLD3-FI-7300 GLD-FI-3000 GLD3-FI-3000  Environmental Temperature range Humidity range Altitude	1 year Gold Support for the FI2-7300 kit  3 year Gold Support for the FI2-7300 kit  1 year Gold Support for the FI-3000 camera  3 year Gold Support for the FI-3000 camera  Operating: -10° C to +45° C (+14° F to +113° F) Storage: -10° C to +60° C (+14° F to +140° F)  Operating: 0 % to 95 % (32° F to 95° F, 0° C to 35° C) RH non-condensing Storage: 0 % to 95 % (95° F to 113° F, 35° C to 45° C) RH non-condensing  Operating: 4,000 m (3,200 m with AC adapter) Storage: 12,000 m
GLD-FI-7300 GLD3-FI-7300 GLD-FI-3000 GLD3-FI-3000  Environmental Temperature range Humidity range Altitude Vibration	1 year Gold Support for the FI2-7300 kit  3 year Gold Support for the FI2-7300 kit  1 year Gold Support for the FI-3000 camera  3 year Gold Support for the FI-3000 camera  Operating: -10° C to +45° C (+14° F to +113° F) Storage: -10° C to +60° C (+14° F to +140° F)  Operating: 0 % to 95 % (32° F to 95° F, 0° C to 35° C) RH non-condensing Storage: 0 % to 95 % (95° F to 113° F, 35° C to 45° C) RH non-condensing  Operating: 4,000 m (3,200 m with AC adapter) Storage: 12,000 m





Endtype Support	Single Fiber and MPO: 1x8 (8 fibers), 1x12 (8, 10, or 12 fibers), 1x16 (16 fibers), 2x12 (16, 20, or 24 fibers), 2x16 (32 fibers)
Test Limits	IEC 61300-3-35 ED. 2 MM IEC 61300-3-35 ED. 2 SM APC Document Only
Camera type	5 Megapixel 1/4-inch CMOS sensor
Field of view	610 μm x 460 μm
Resolution	1 μm
Light source	LED, >100,000 hr life
Endface illumination	Coaxial blue LED
Port illumination	White LED
Battery Type	Lithium-ion; 10.8 hour life
Power Adapter	Input: 100 to 240 VAC ±10 %, 50/60 Hz Output: 15 VDC, 2 A maximum Class II
Wireless Transmission*	Output power: <100 mW Frequency ranges: 2.4 GHz (2412 MHz to 2462 MHz)
Dimensions	6.625 in x 5.375 in x 2.125 in (168 mm x 137 mm x 54 mm) (with no dust cap or adapter tip) Length with dust cap: 7.5 in (191 mm)
Weight	11.5 oz (326 gm) (with dust cap and no adapter tip)

 $<sup>^* \</sup>textit{For more information, go to } \textbf{www.flukenetworks.com/manuals} \textit{ and search for "Radio Frequency Data for Class A"}$ 



### **About Fluke Networks**

Fluke Networks is the worldwide leader in certification, troubleshooting, and installation tools for professionals who install and maintain critical network cabling infrastructure. From installing the most advanced data centers to restoring service in the worst weather, our combination of legendary reliability and unmatched performance ensure jobs are done efficiently. The company's flagship products include the innovative LinkWare™ Live, the world's leading cloud-connected cable certification solution with over fourteen million results uploaded to date.

1-800-283-5853 (US & Canada)

1-425-446-5500 (International)

http://www.flukenetworks.com

Descriptions, information, and viability of the information contained in this document are subject to change without notice.

Revised: July 30, 2025 8:22 AM

Literature ID: 7002773 C

© Fluke Networks 2018